
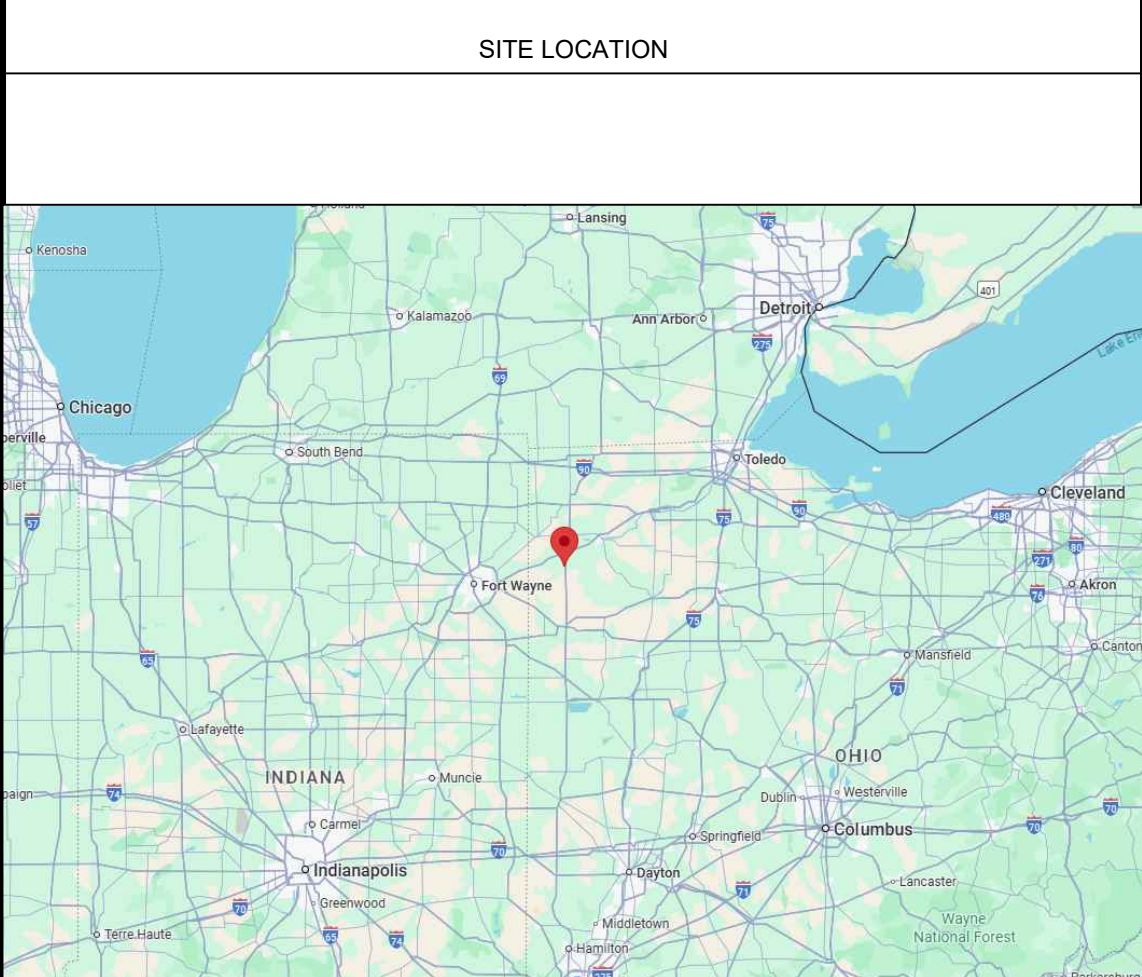


PAULDING CO COMMISSIONERS SOLAR PV ARRAY

451 E. MCDONALD PIKE PAULDING, OH 45879

69.96 kW DC / 50 kW AC PHOTOVOLTAIC SYSTEM

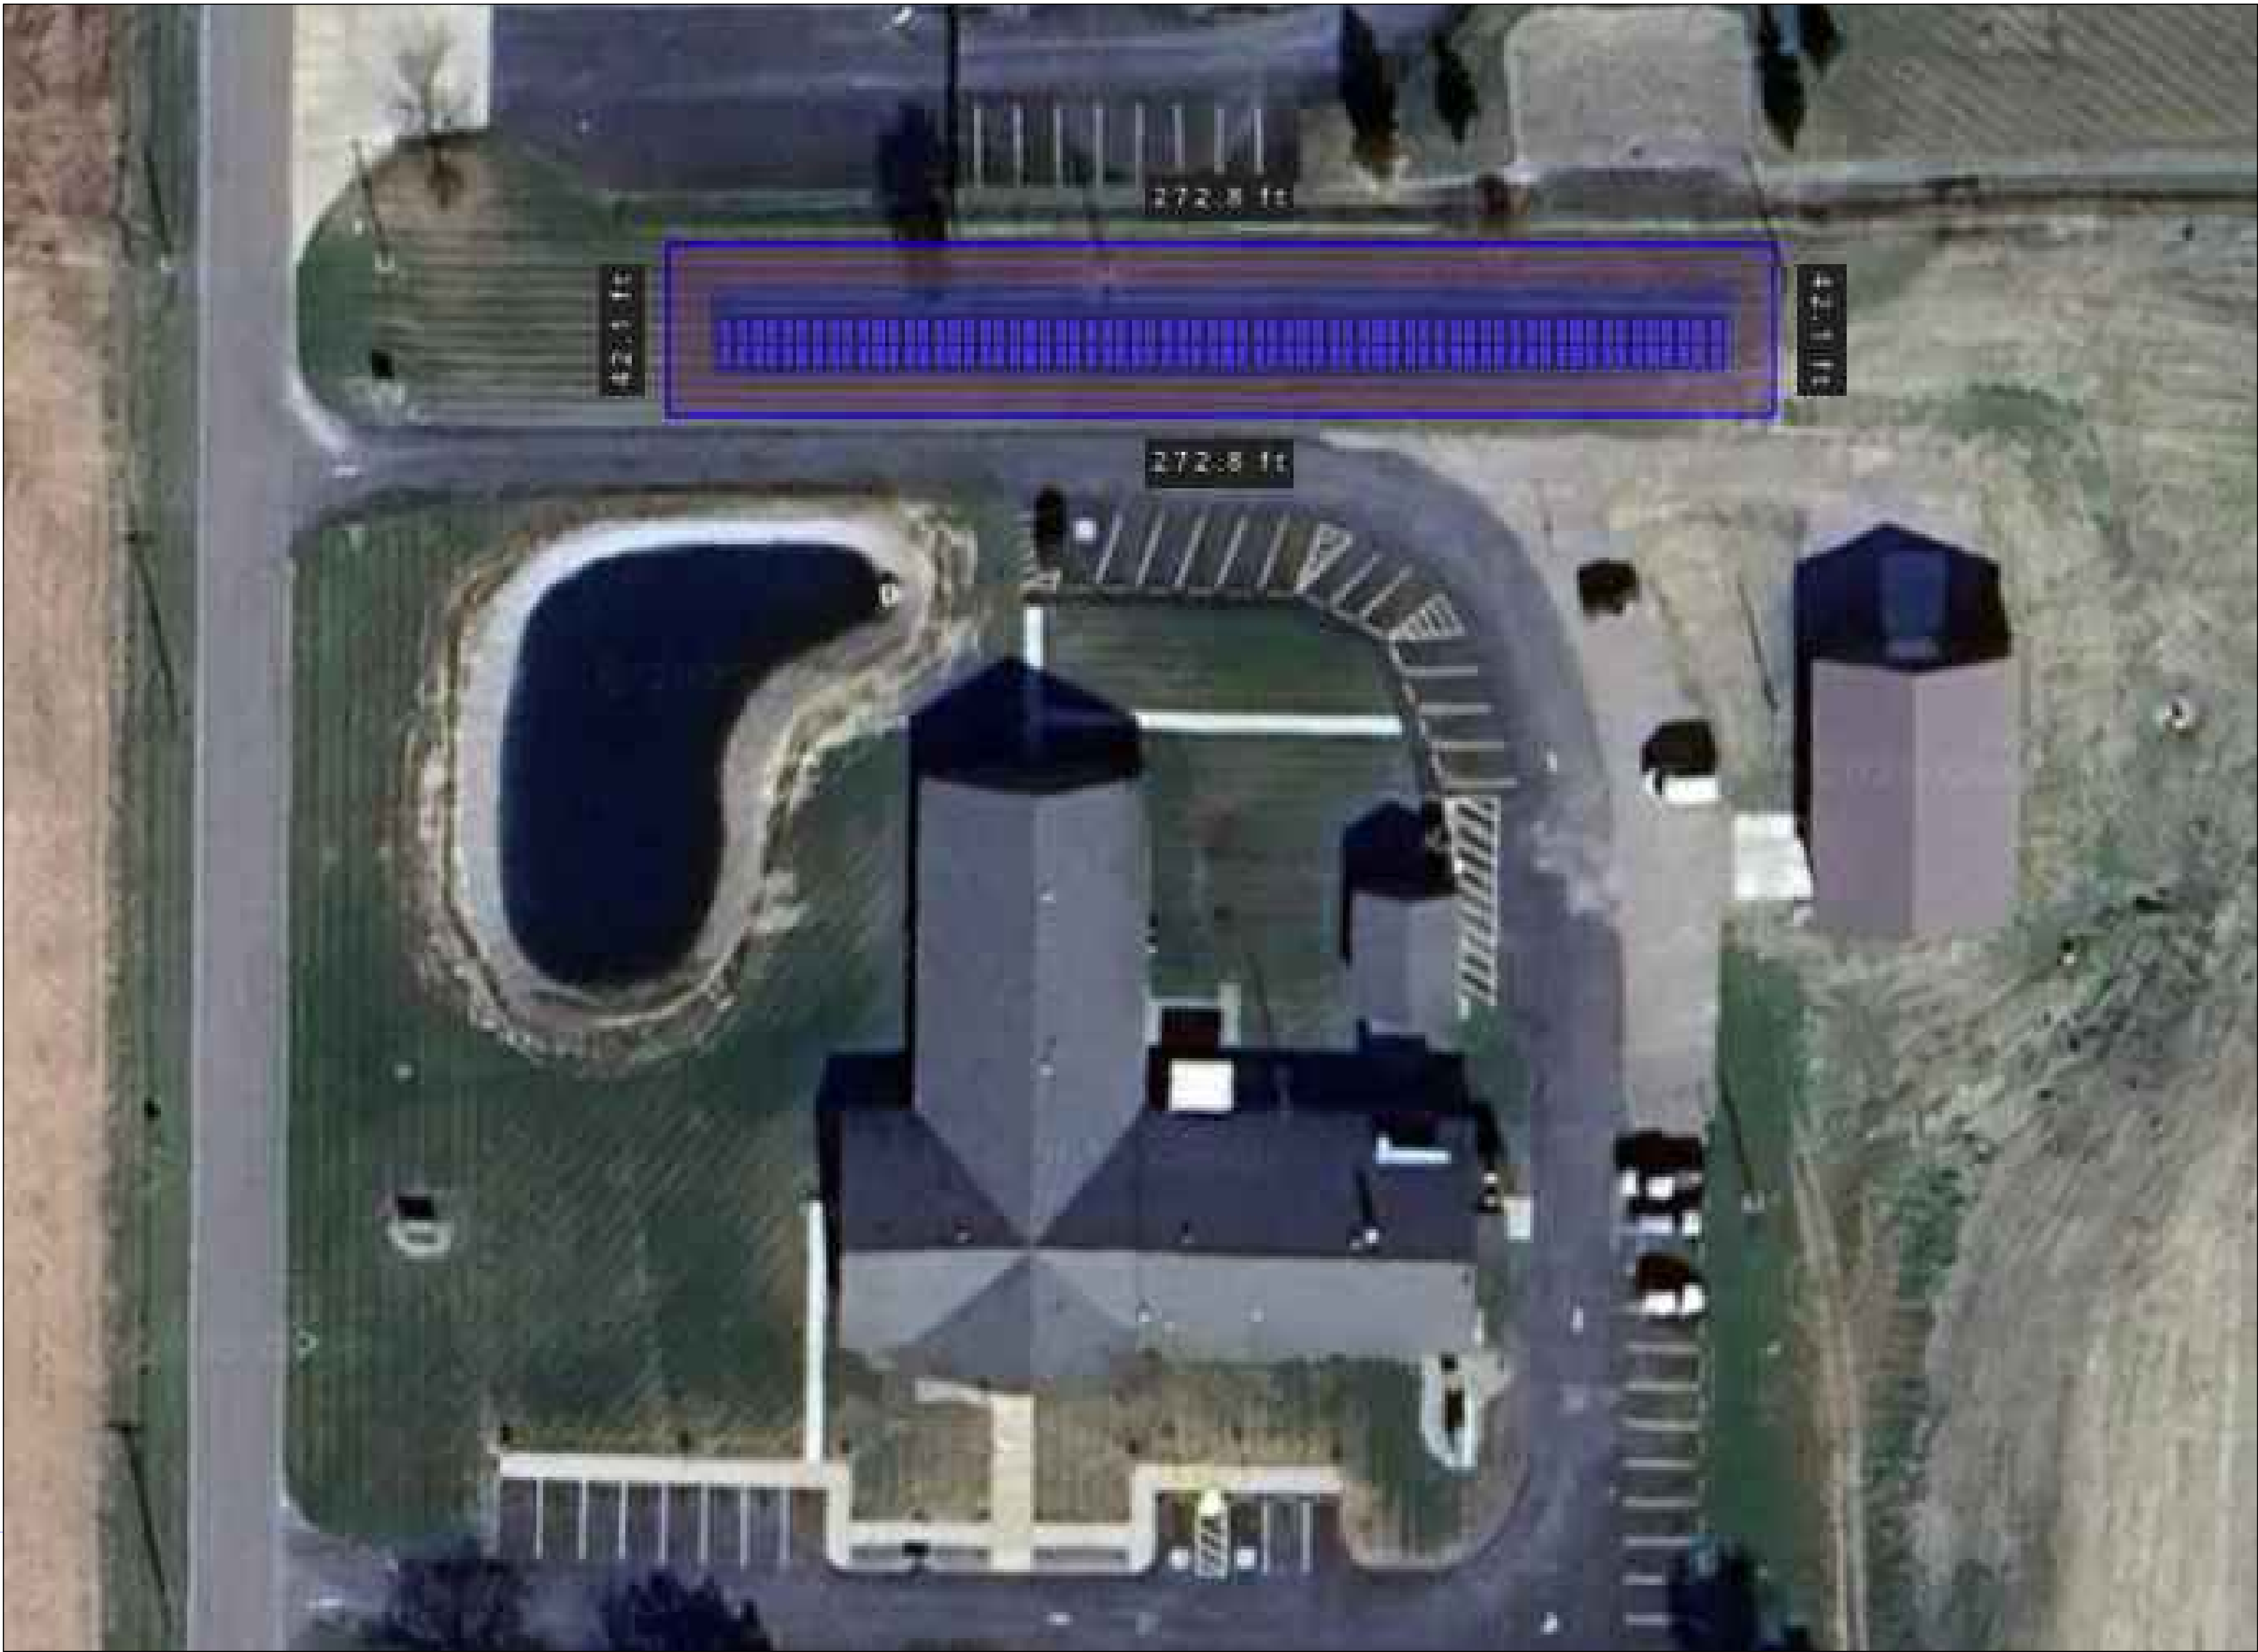

GENERAL NOTES

THIS PROJECT SHALL CONFORM TO THE NATIONAL ELECTRICAL CODE (NEC) 2023

PROJECT SCOPE

SOLAR ELECTRICAL SYSTEM

THE PROJECT ENTAILS THE INSTALLATION OF A SOLAR PHOTOVOLTAIC SYSTEM AT THE PROJECT SITE. THE SYSTEM WILL BE CAPABLE OF EXPORT TO THE UTILITY GRID, BUT THE PRIMARY USER IS THE SITE CUSTOMER.

THE INSTALLATION IS A FIXED-TILT, GROUND-MOUNTED PHOTOVOLTAIC ARRAY.

THE SYSTEM WILL BE INTERCONNECTED TO AND WILL BE OPERATED IN PARALLEL WITH THE ENERGY PROVIDER ELECTRICAL GRID PER THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE.


| PROJECT INFORMATION     |             |                          |             |
|-------------------------|-------------|--------------------------|-------------|
| Project Latitude        | 37°47'42"   | Min. Ambient Temperature | 0°C         |
| Project Longitude       | -122°23'38" | Max. Ambient Temperature | 40°C        |
| Utility Name            | AEP Ohio    | Meter Number             | 454 940 414 |
| Wind Exposure Category  | A           | Wind Speed               | 0           |
| Risk Category           | I           | North Direction          | ----        |
| Interconnection Voltage | ----        | AHJ                      | ----        |

| ARRAY INFORMATION |                     |                       |                     |
|-------------------|---------------------|-----------------------|---------------------|
| ARRAY 1           |                     |                       |                     |
| Module Name       | SIL-530 XM          |                       |                     |
| Inverter          | SE50KUS             |                       |                     |
| Tilt Angle 25.0°  | No. of Modules 132  | DC String Length 22   | No. of Strings 6    |
| ARRAY 2           |                     |                       |                     |
| Module Name       | ----                |                       |                     |
| Inverter          | ----                |                       |                     |
| Tilt Angle ----   | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |
| ARRAY 3           |                     |                       |                     |
| Module Name       | ----                |                       |                     |
| Inverter          | ----                |                       |                     |
| Tilt Angle ----   | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |

30% Drawings


Not for Construction

| DRAWING INDEX |                           |
|---------------|---------------------------|
| DWG NUMBER    | TITLE                     |
| PV E1.1       | SITE PLAN & GENERAL NOTES |
| PV E2.1       | ARRAY LAYOUT              |
| PV E2.2       | STRING WIRE LAYOUT        |
| PV E3.1       | SINGLE LINE DIAGRAM       |
| PV E3.2       |                           |
| PV E4.1       |                           |
| PV E5.1       | MANUFACTURER CUTSHEETS    |
| PV E6.1       |                           |

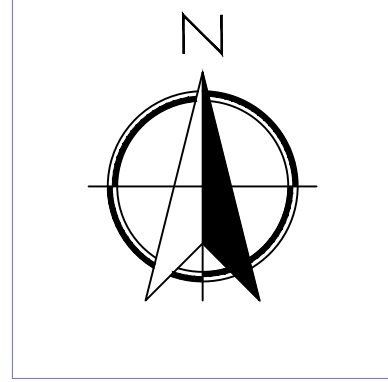

| Rev  | Description | Date | Drawn By | Engineering Stamp | Company Contact Info                                                                                                                                                                                             | Customer                  | Project                   | Location                                            | Sheet Name                                                                                           |
|------|-------------|------|----------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|-----------------------------------------------------|------------------------------------------------------------------------------------------------------|
| ---- | ----        | ---- | ----     |                   | Company Name: TMI Energy Solutions<br>Company Address: 423 W. Wyoming Avenue<br>Cincinnati, OH 45215<br>Company Phone: (513) 821-9900<br>Company FAX: (513) 821-9920<br>Company E-mail: rfindley@tmielectric.com | Paulding Co Commissioners | Paulding Co Commissioners | 451 E. McDonald Pike<br>Paulding<br>Ohio 45879-9270 | SITE PLAN & GENERAL NOTES                                                                            |
|      |             |      |          |                   |                                                                                                                                                                                                                  |                           |                           |                                                     | Designed By Rfindley<br>Project number ----<br>Sheet Title PV E1.1<br>Sheets ---- Issue Sheet Number |


# PV Array

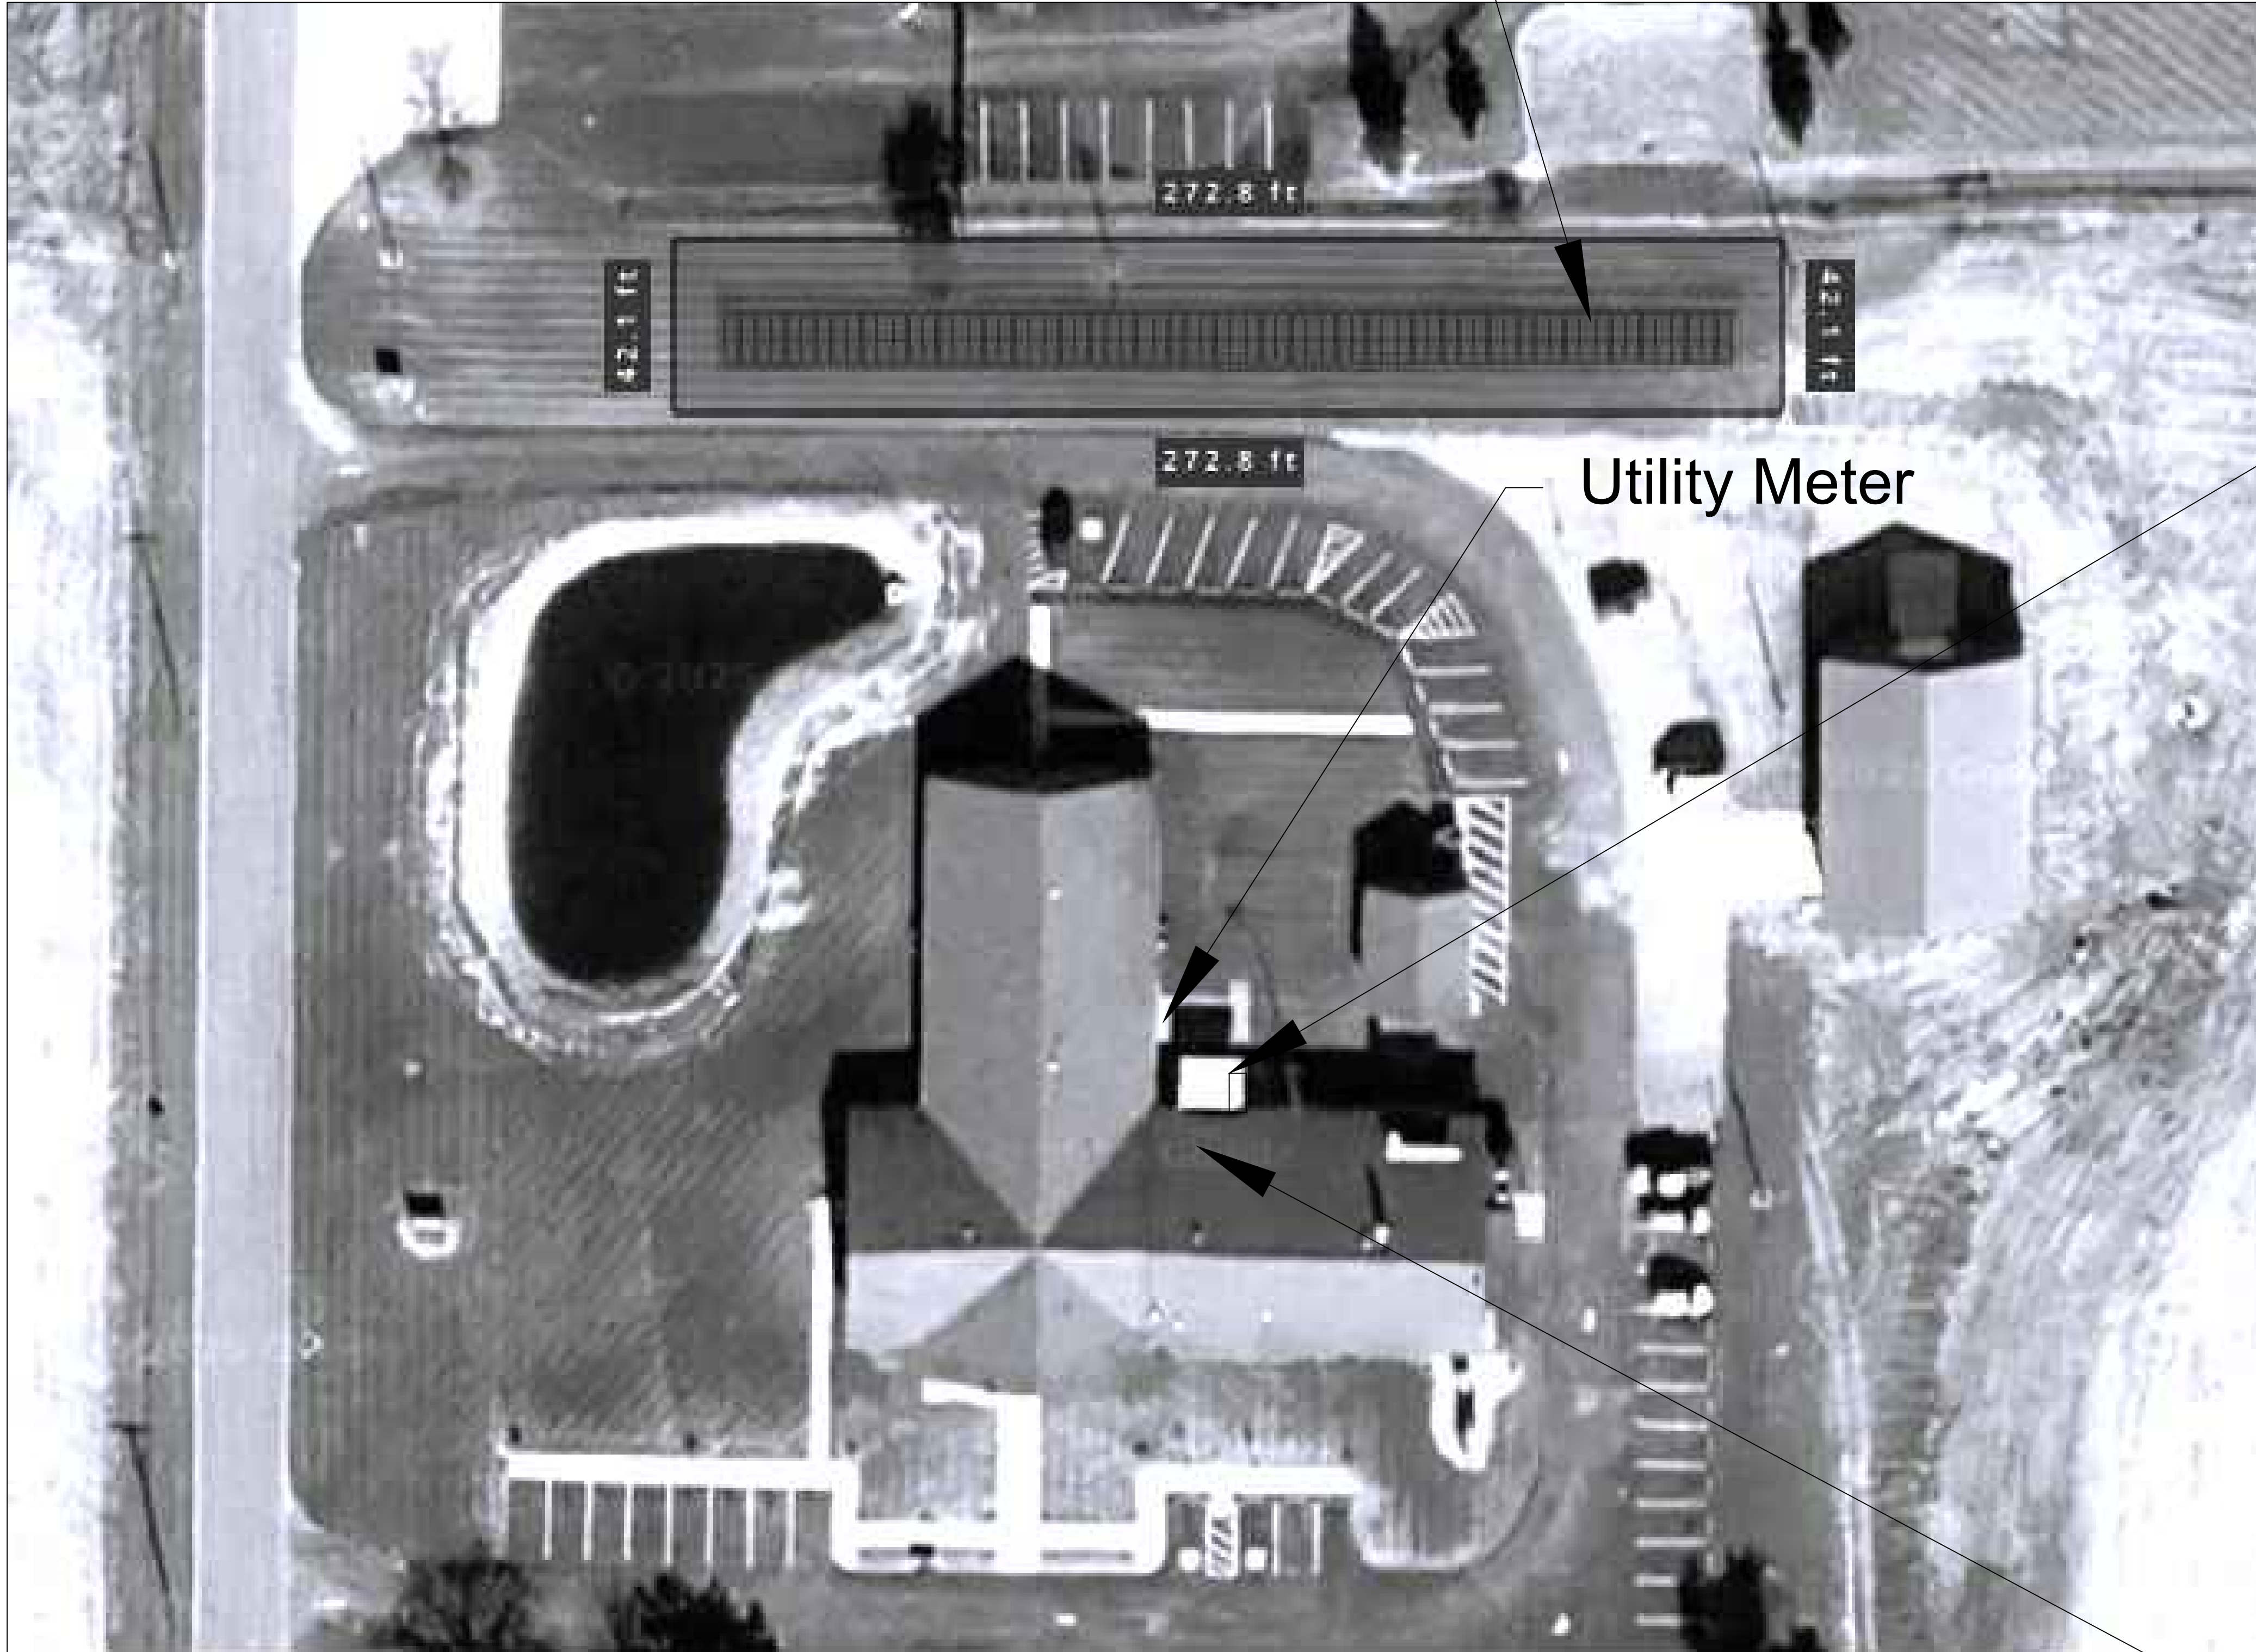

# Utility Meter

# AC Disconnect Switch

# Main Distribution Panel



| PROJECT INFORMATION     |             |                          |             |
|-------------------------|-------------|--------------------------|-------------|
| Project Latitude        | 37°47'42"   | Min. Ambient Temperature | 0°C         |
| Project Longitude       | -122°23'38" | Max. Ambient Temperature | 40°C        |
| Utility Name            | AEP Ohio    | Meter Number             | 454 940 414 |
| Wind Exposure Category  | A           | Wind Speed               | 0           |
| Risk Category           | I           | North Direction          | ----        |
| Interconnection Voltage | ----        | AHJ                      | ----        |

| ARRAY INFORMATION |                     |                       |                     |
|-------------------|---------------------|-----------------------|---------------------|
| ARRAY 1           |                     |                       |                     |
| Module Name       | SIL-530 XM          |                       |                     |
| Inverter          | SE50KUS             |                       |                     |
| Tilt Angle 25.0°  | No. of Modules 132  | DC String Length 22   | No. of Strings 6    |
| ARRAY 2           |                     |                       |                     |
| Module Name       | ----                |                       |                     |
| Inverter          | ----                |                       |                     |
| Tilt Angle ----   | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |
| ARRAY 3           |                     |                       |                     |
| Module Name       | ----                |                       |                     |
| Inverter          | ----                |                       |                     |
| Tilt Angle ----   | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |

## 30% Drawings Not for Construction


| Rev  | Description | Date | Drawn By | Engineering Stamp | Company Contact Info                                                                                     |  | Customer | Paulding Co Commissioners                        | Sheet Name     |          |              |         |  |
|------|-------------|------|----------|-------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|--------------------------------------------------|----------------|----------|--------------|---------|--|
| ---- | ----        | ---- | ----     |                   | Company Name: TMI Energy Solutions<br>423 W. Wyoming Avenue<br>Cincinnati, OH 45215                      |                                                                                       | Project  | Paulding Co Commissioners<br>----                | ARRAY LAYOUT   |          |              |         |  |
| ---- | ----        | ---- | ----     |                   | Company Phone: (513) 821-9900<br>Company FAX: (513) 821-9920<br>Company E-mail: rfindley@tmielectric.com |                                                                                       | Location | 451 E. McDonald Pike<br>Paulding Ohio 45879-9270 | Designed By    | Rfindley | Sheet Title  | PV E2.1 |  |
| ---- | ----        | ---- | ----     |                   |                                                                                                          |                                                                                       |          |                                                  | Project number | ----     | Sheets       | ----    |  |
| ---- | ----        | ---- | ----     |                   |                                                                                                          |                                                                                       |          |                                                  |                |          | Issue        |         |  |
| ---- | ----        | ---- | ----     |                   |                                                                                                          |                                                                                       |          |                                                  |                |          | Sheet Number |         |  |





SILFAB  
COMMERCIAL NTC

SIL-530 XM  
BIFACIAL

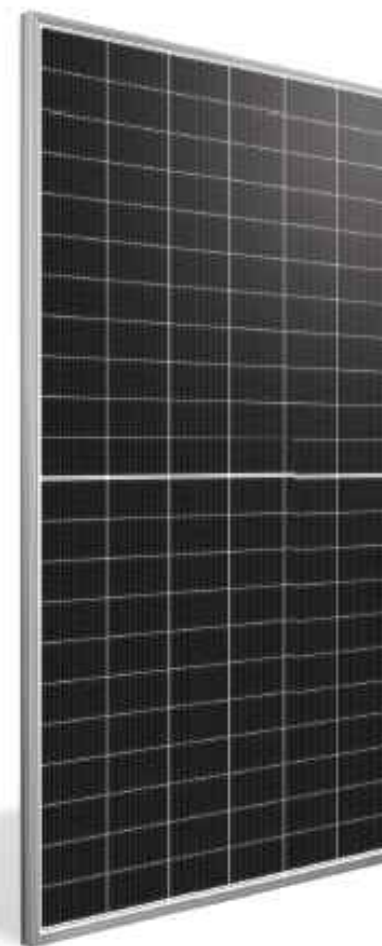

NEXT-GENERATION N-TYPE  
CELL TECHNOLOGY

Manufactured exclusively in the USA.

Improved Shade Tolerance

Improved Low-Light Performance

Increased Performance in High Temperatures

Efficient Bifacial Energy Yield

Enhanced Durability

Reduced Degradation Rate

25-Year Product Warranty/ 30-Year Performance Warranty



SILFABSOLAR.COM

ELECTRICAL SPECIFICATIONS

|                              |    | STC   | 85°C     | NOCT  |
|------------------------------|----|-------|----------|-------|
| Test Conditions              |    |       |          |       |
| Module Power (Pmax)          | Wp | 330   | 319.2    | 390.3 |
| Maximum power voltage (Vmp)  | V  | 42.65 | 41.46    | 51.76 |
| Maximum power current (Imp)  | A  | 12.91 | 14.08    | 19.36 |
| Open circuit voltage (Voc)   | V  | 47.74 | 47.79    | 43.91 |
| Short circuit current (Isc)  | A  | 13.71 | 14.96    | 13.00 |
| Module efficiency            | %  | 22.3% |          |       |
| Maximum system voltage (VDC) | V  |       | 1500     |       |
| Series fuse rating           | A  |       | 30       |       |
| Power Tolerance              | Wp |       | 0 to +30 |       |
| Efficiency Factor            | %  |       | 89 ± 30  |       |

Performance conditions: Measurement tolerance ± 2%, standard test conditions (STC): 1000 W/m², AM 1.5, Temperature 25 °C -Nominal Operating Cell Temperature (NOCT): 800 W/m², AM 1.5, Bifacial Standard test conditions (85°C): 1000 W/m² ± 0.13 W/m², ± 80 %, AM 1.5 - Electrical characteristics may vary by site.

MECHANICAL PROPERTIES / COMPONENTS

|                                                      | METRIC                                                                                                                  | IMPERIAL                                                             |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Module weight                                        | 26.2 kg ± 0.2 kg                                                                                                        | 57.8 lbs ± 0.4 lbs                                                   |
| Dimensions (H x L x D)                               | 2098 mm ± 12.5 mm x 331 mm                                                                                              | 82.6 in ± 0.4 in x 13.0 in                                           |
| Maximum surface load (wind/snow)*                    | 2400 Pa rear load / 5400 Pa front load                                                                                  | 56.3 lbf/ft² rear load / 122.8 lbf/ft² front load                    |
| Hail impact resistance                               | ≥ 25 mm at 10 km/h                                                                                                      | ≥ 1 in at 10.5 km/h                                                  |
| Cells                                                | 132 Half cells, N-Type Silicon solar cell<br>182 ± 0.1 mm                                                               | 132 Half cells, N-Type Silicon solar cell<br>3.58 ± 0.1 in           |
| Glass                                                | 3.2 mm high transmittance, tempered,<br>DSM antireflective coating                                                      | 0.126 in high transmittance, tempered,<br>DSM antireflective coating |
| Cables and connectors (refer to installation manual) | 1350 mm, 4 x 7 mm, EVG2 from Staubli                                                                                    | 53.1 in, 0.22 in (132AWG), EVG2 from Staubli                         |
| Backsheet                                            | High durability, superior hydrolysis and UV resistance, multi-layer dielectric film,<br>Burnout free clear PV backsheet |                                                                      |
| Frame                                                | Anodized Aluminum (Silver)                                                                                              |                                                                      |
| Junction Box                                         | UL 3730 Certified, IEC 62760 Certified, IP68 rated, 3 diodes                                                            |                                                                      |


TEMPERATURE RATINGS

|                              | WARRANTIES                          |
|------------------------------|-------------------------------------|
| Temperature Coefficient Isc  | Module product workmanship warranty |
| Temperature Coefficient Voc  | 25 years**                          |
| Temperature Coefficient Pmax | Linear power performance guarantee  |
| NOCT (± 2°C)                 | ≥ 98% end 10k yr                    |
| Operating temperature        | ≥ 94.7% end 12k yr                  |
|                              | ≥ 96.8% end 25k yr                  |
|                              | ≥ 88.3% end 30k yr                  |

CERTIFICATIONS

|         | SHIPPING SPECS                                                                                                                                             |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product | UL 61215, UL 6170, CSA C22.2#6730, IEC 61215, IEC 6170, IEC 61701 (Salt Mist Corrosion), IEC 62715 (Ammonia Corrosion), CEC Listed, UL Fire Rating: Type 1 |
| Factory | ISO9001:2015                                                                                                                                               |

▲ Warning: Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.  
12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at [silfab.com](#).  
FNA files generated from 3rd party performance data are available for download at: [silfab.com/downloads](#).

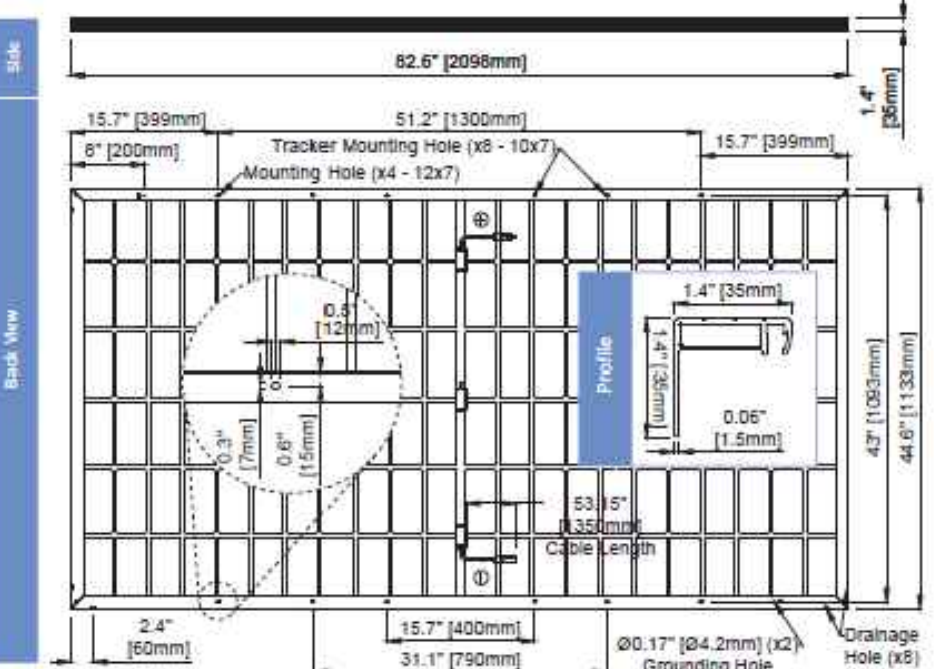

SILFAB SOLAR INC.

1770 Port Drive  
Burlington WA 98023 USA  
T +1 360 569 4733  
info@silfab.com  
+1 360 569 4411 - C&W  
7149 Logistics Lane  
Fort Mill SC 29715 USA  
T +1 839 400 4338  
240 Courteneypark Drive East  
Mississauga ON L5T 2Y7 Canada  
T +1 905 255 2501  
F +1 905 696 0267  
Sales & Customer Support  
T +1 533 596 6442  
  
SIL-530-XM-BIFACIAL 20250527  
No reproduction of any kind is allowed without permission.  
Data and information subject to verification without  
notice of silfab solar inc. 2024. Silfab Solar Inc. is a registered  
trademark of silfab solar inc.

Three Phase Inverter with Synergy Technology

For the 208V Grid for North America

SE50KUS

| MODEL NUMBER                                                        | SEExK-USx2bxxxx                                                                                      | UNITS |
|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------|
| APPLICABLE TO INVERTERS WITH PART NUMBER                            |                                                                                                      |       |
| SESOKUS                                                             |                                                                                                      |       |
| OUTPUT                                                              |                                                                                                      |       |
| Rated AC Active Output Power                                        | 50000                                                                                                | W     |
| Maximum AC Apparent Output Power                                    | 50000                                                                                                | VA    |
| AC Output Line Connections                                          | 3W + PE 4W + PE                                                                                      |       |
| Supported Grids                                                     | WYE TH-C, TH-S, TH-C-S, TT, IT, Delta, IT                                                            |       |
| AC Output Voltage Minimum-Nominal-Maximum <sup>(1)</sup> (L-L)      | 105 – 120 – 132.5                                                                                    | Vac   |
| AC Output Voltage Minimum-Nominal-Maximum <sup>(1)</sup> (L-N)      | 183 – 208 – 229                                                                                      | Vac   |
| AC Frequency Min-Nom-Max <sup>(1)</sup>                             | 59.5 – 60 – 60.5                                                                                     | Hz    |
| Maximum Continuous Output Current (per Phase, PFA <sup>(1)</sup> )  | 139.5                                                                                                | Aac   |
| GFD Threshold                                                       | 1                                                                                                    | A     |
| Utility Monitoring, Islanding Protection, Configurable Power Factor | Yes                                                                                                  |       |
| Country Configurable Thresholds                                     | ± 3                                                                                                  | %     |
| Total Harmonic Distortion                                           | ±0.85 to 1                                                                                           |       |
| Power Factor Range                                                  |                                                                                                      |       |
| INPUT                                                               |                                                                                                      |       |
| Maximum DC Power (Module STC) Inverter / Synergy Unit               | 87500 / 23165                                                                                        | W     |
| Transformer-less, Ungrounded                                        | Yes                                                                                                  |       |
| Maximum Input Voltage DC+ to DC-                                    | 600                                                                                                  | Vdc   |
| Operating Voltage Range                                             | 370 – 600                                                                                            | Vdc   |
| Maximum Input Current                                               | 9 ± 46.5                                                                                             | Adc   |
| Reverse-Polarity Protection                                         | Yes                                                                                                  |       |
| Ground-Fault Isolation Detection                                    | 167Vdc sensitivity per Synergy Unit <sup>(1)</sup>                                                   |       |
| CSC Weighted Efficiency                                             | 97                                                                                                   | %     |
| Nighttime Power Consumption                                         | < 12                                                                                                 | W     |
| ADDITIONAL FEATURES                                                 |                                                                                                      |       |
| Supported Communication Interfaces <sup>(1)</sup>                   | 2 x RS485, Ethernet, Wi-Fi (optional), Cellular (optional)                                           |       |
| Smart Energy Management                                             | Export Limitation                                                                                    |       |
| Inverter Commissioning                                              | With the SetApp mobile application using built-in Wi-Fi access point for local connection            |       |
| Arc Fault Protection                                                | Built-in, User Configurable (According to UL1699B)                                                   |       |
| Photovoltaic Rapid Shutdown System                                  | NEC 2014 – 2023, built-in                                                                            |       |
| PID Reformer                                                        | Nighttime, built-in                                                                                  |       |
| RS485 Surge Protection (ports 1+2)                                  | Type II, field replaceable, integrated                                                               |       |
| AC DC Surge Protection                                              | Type II, field replaceable, integrated                                                               |       |
| DC Fuses (Single Pole)                                              | 2SA, integrated                                                                                      |       |
| Pre-Commissioning                                                   | Built-in <sup>(1)</sup>                                                                              |       |
| VAR at Night <sup>(1)</sup>                                         | Yes                                                                                                  |       |
| DC SAFETY SWITCH                                                    |                                                                                                      |       |
| DC Disconnect                                                       | Built-in                                                                                             |       |
| STANDARD COMPLIANCE                                                 |                                                                                                      |       |
| Safety                                                              | UL1699B, UL1741, UL1741 SA, UL1741 SB, UL1998, CSA C22.2#107.1, Canadian APC according to T.L. 14-07 |       |
| Grid Connection Standards                                           | IEEE 1547-2018, Rule 21, Rule 14 (H)                                                                 |       |
| Emissions                                                           | FCC part 15 class A                                                                                  |       |

GENERAL NOTES

SHEET SUMMARY

PROJECT INFORMATION

|                         |             |                          |             |
|-------------------------|-------------|--------------------------|-------------|
| Project Latitude        | 37°47'42"   | Min. Ambient Temperature | 0°C         |
| Project Longitude       | -122°23'38" | Max. Ambient Temperature | 40°C        |
| Utility Name            | AEP Ohio    | Meter Number             | 454 940 414 |
| Wind Exposure Category  | A           | Wind Speed               | 0           |
| Risk Category           | I           | North Direction          | ----        |
| Interconnection Voltage | ----        | AHJ                      | ----        |

ARRAY INFORMATION

|                  |                     |                       |                     |
|------------------|---------------------|-----------------------|---------------------|
| ARRAY 1          |                     |                       |                     |
| Module Name      | SIL-530 XM          |                       |                     |
| Inverter         | SE50KUS             |                       |                     |
| Tilt Angle 25.0° | No. of Modules 132  | DC String Length 22   | No. of Strings 6    |
| ARRAY 2          |                     |                       |                     |
| Module Name      | ----                |                       |                     |
| Inverter         | ----                |                       |                     |
| Tilt Angle ----  | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |
| ARRAY 3          |                     |                       |                     |
| Module Name      | ----                |                       |                     |
| Inverter         | ----                |                       |                     |
| Tilt Angle ----  | No. of Modules ---- | DC String Length ---- | No. of Strings ---- |

Power Optimizer  
For North America

POWER OPTIMIZER

P1100

PV power optimization at the module level

The most cost-effective solution for commercial and large field installations

Specifically designed to work with SolarEdge inverters

High efficiency with module-level MPPT, for maximized system energy production and revenue, and fast project ROI

Superior efficiency (99.5%)

Balance of System cost reduction; 50% less cables, fuses, and combiner boxes; over 2x longer string lengths possible

Fast installation with a single bolt

Advanced maintenance with module-level monitoring

Module-level voltage shutdown for installer and firefighter safety

Use with parallel PV modules connected in series

Power Optimizer  
For North America

P1100

| Power Optimizer Model<br>(Typical Module Compatibility)                                              | P1100<br>(for up to 2 x high power or bi-facial modules) | Units   |
|------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------|
| INPUT                                                                                                |                                                          |         |
| Rated Input DC Power <sup>(1)</sup>                                                                  | 1100                                                     | W       |
| Connection Method                                                                                    | Single input for series connected modules                |         |
| Absolute Maximum Input Voltage (Voc at lowest temperature)                                           | 125                                                      | Vdc     |
| MPPT Operating Range                                                                                 | 12.5 – 105                                               | Vdc     |
| Maximum Short Circuit Current per input (Isc)                                                        | 14.1                                                     | Adc     |
| Maximum Efficiency                                                                                   | 99.5                                                     | %       |
| Weighted Efficiency                                                                                  | 98.6                                                     | %       |
| Overvoltage Category                                                                                 | II                                                       |         |
| OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO SOLAREGE INVERTER)                             |                                                          |         |
| Maximum Output Current                                                                               | 18                                                       | Adc     |
| Maximum Output Voltage                                                                               | 80                                                       | Vdc     |
| OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREGE INVERTER OR SOLAREGE INVERTER OFF) |                                                          |         |
| Safety Output Voltage per Power Optimizer                                                            | 1 ± 0.1                                                  | Vdc     |
| STANDARD COMPLIANCE                                                                                  |                                                          |         |
| Photovoltaic Rapid Shutdown System                                                                   | NEC 2014                                                 |         |
| EMC                                                                                                  | FCC Part 15 Class A, IEC61000-6-2, IEC61000-6-3          |         |
| Safety                                                                                               | IEC62109-1 (class II safety), UL1741, CSA C22.2#107.1    |         |
| Material                                                                                             | UL94 V-0, UV Resistant                                   |         |
| RoHS                                                                                                 | Yes                                                      |         |
| INSTALLATION SPECIFICATIONS                                                                          |                                                          |         |
| Compatible SolarEdge Inverters                                                                       | All commercial three phase inverters                     |         |
| Maximum Allowed System Voltage                                                                       | 1000                                                     | Vdc     |
| Dimensions (W x L x H)                                                                               | 129 x 162 x 39 / 5.1 x 6.4 x 2.3                         | mm / in |
| Weight                                                                                               | 1064 / 2.34                                              | g / lb  |
| Input Connector                                                                                      | MC4 <sup>(1)</sup>                                       |         |
| Input Wire Length                                                                                    | 1.6 / 5.24                                               | m / ft  |
| Output Wire Length                                                                                   | 2.4 / 7.8                                                | m / ft  |
| Output Wire Type / Connector                                                                         | Double Insulated / MC4                                   |         |
| Operating Temperature Range <sup>(1)</sup>                                                           | -40 to +85 / -40 to +185                                 | °C / °F |
| Protection Rating                                                                                    | IP68 / NEMA6P                                            |         |
| Relative Humidity                                                                                    | 0 – 100                                                  | %       |

(1) Rated power of the module at STC will not exceed the Power Optimizer "Rated Input DC Power". Modules with up to +5% power tolerance are allowed.  
(2) For other connector types please refer to [Power Optimizer Input Connector Compatibility Technical Note](#).  
(3) For ambient temperatures above +70°C / +187°F power de-rating is applied. Refer to the [Temperature De-rating Technical Note](#) for more details.

| PV System Design Using a SolarEdge Inverter <sup>(1)(2)</sup>                                                                        |                  | 208V Grid<br>SE9K                           | 208V Grid<br>SE73K <sup>(3)</sup>             | 277/480V Grid<br>SE9K                         | 277/480V Grid<br>SE9K <sup>(3)</sup>                   |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------|-----------------------------------------------|-----------------------------------------------|--------------------------------------------------------|
| Compatible Power Optimizers                                                                                                          |                  | P1100                                       |                                               |                                               |                                                        |
| Minimum String Length                                                                                                                | Power Optimizers | 8                                           | 10                                            | 14                                            | 14                                                     |
|                                                                                                                                      | PV Modules       | 15                                          | 19                                            | 27                                            | 27                                                     |
| Maximum String Length                                                                                                                | Power Optimizers | 30                                          | 30                                            | 30                                            | 30                                                     |
|                                                                                                                                      | PV Modules       | 60                                          | 60                                            | 60                                            | 60                                                     |
| Maximum Continuous Power per String                                                                                                  |                  | 7200                                        | 8820                                          | 15300                                         | 15300                                                  |
| Maximum Allowed Connected Power per String <sup>(1)</sup>                                                                            |                  | 1 string – 8400<br>2 strings or more – 9800 | 1 string – 10020<br>2 strings or more – 10200 | 1 string – 17550<br>2 strings or more – 20300 | 2 strings or less – 17550<br>3 strings or more – 20300 |
| Parallel Strings of Different Lengths or Orientations                                                                                |                  | Yes                                         |                                               |                                               |                                                        |
| Maximum Difference in Number of Power Optimizers Allowed Between the Shortest and Longest String Connected to the Same Inverter Unit |                  | 1: Power Optimizers                         |                                               |                                               |                                                        |

| Rev  | Description | Date | Drawn By | Engineering Stamp | Company Contact Info                                                                                                                                                                                         | Customer                  | Project                   | Location                                         | Sheet Name             |
|------|-------------|------|----------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|--------------------------------------------------|------------------------|
| ---- | ----        | ---- | ----     |                   | Company Name: TMI Energy Solutions<br>Company Address: 423 W. Wyoming Avenue Cincinnati, OH 45215<br>Company Phone: (513) 821-9900<br>Company FAX: (513) 821-9920<br>Company E-mail: rfindley@tmieletric.com | Paulding Co Commissioners | Paulding Co Commissioners | 451 E. McDonald Pike<br>Paulding Ohio 45879-9270 | MANUFACTURER CUTSHEETS |
|      |             |      |          |                   |                                                                                                                                                                                                              | Designed By Rfindley      | Sheet Title PV E5.1       |                                                  |                        |
|      |             |      |          |                   |                                                                                                                                                                                                              | Project number ----       | Sheets ----               | Issue                                            | Sheet Number           |